


Industry: Defense
Application: Missile Guidance System
Summary: This high density COTS DC input, dual output supply is fully qualified to rugged environmental requirements, including HALT testing and MIL-STD-461 EMI. It provides ± 45 Vdc at 200 Watts for each output.

Specifications

Input: 28 Vdc
Output: +45 and -45 Vdc @ 200 Watts for each output
Total Power: 400 Watts
Weight: 1.25 lb.
Dimensions: 4.75"L X 4.5"W X 3.0"H
Operating Temperature: -55 to +100°C Baseplate
Cooling: Conduction

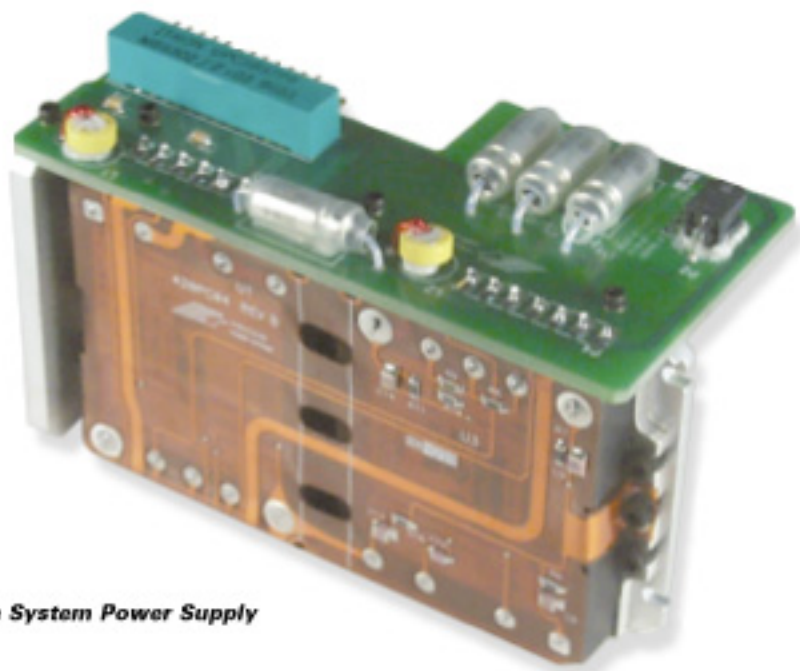

F-2001: Missile Guidance System Power Supply