


Industry: Defense
Application: Missile Guidance System
Summary: This high density COTS DC input, dual output supply is fully qualified to rugged environmental requirements, including HALT testing and MIL-STD-461 EMI. It provides ± 25 VDC at 100 Watts for each output.

Specifications

Input: 28 Vdc
Output: +25 and -25 Vdc at 100 Watts for each output
Total Power: 200 Watts
Weight: 0.85 lb.
Dimensions: 2.5"H X 4.5"L X 3.0"W
Operating Temperature: -55 to +100°C Baseplate
Cooling: Conduction

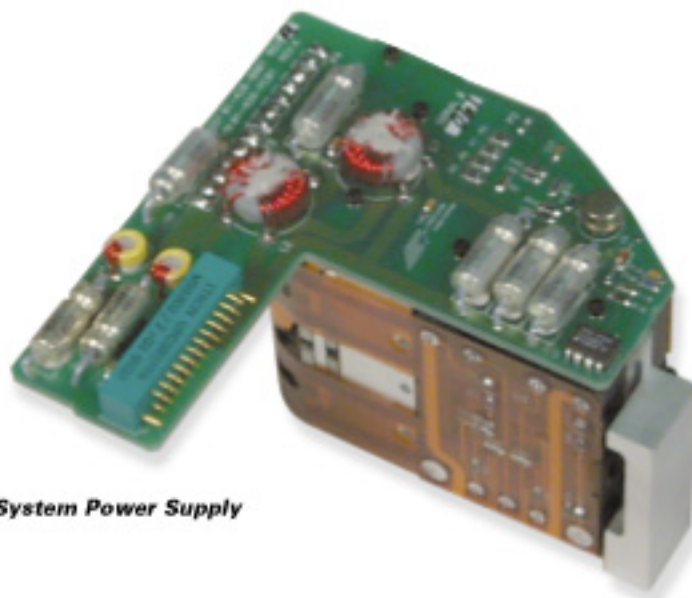

F-2002: Missile Guidance System Power Supply