


Industry: Defense
Application: Missile Guidance & Control
Summary: This 168 Watt solution provides 3 outputs in a ruggedized supply to power analog circuitry from a 28 Vdc battery input.

Specifications

Input: 18 to 36Vdc
Output: +18 Vdc @ 5.5 Amps
-18 Vdc @ 2.6 Amps
-9 Vdc @ 2.4 Amps

Total Power: 168 Watts
Dimensions: 3.3"W x 4.8"L x 4.4"H
Operating Temperature: -55 to +85°C
Acceleration: 20Gs
Cooling: Cold Plate
Other Features: HALT Qualified
Current Limiting
Sequence Input

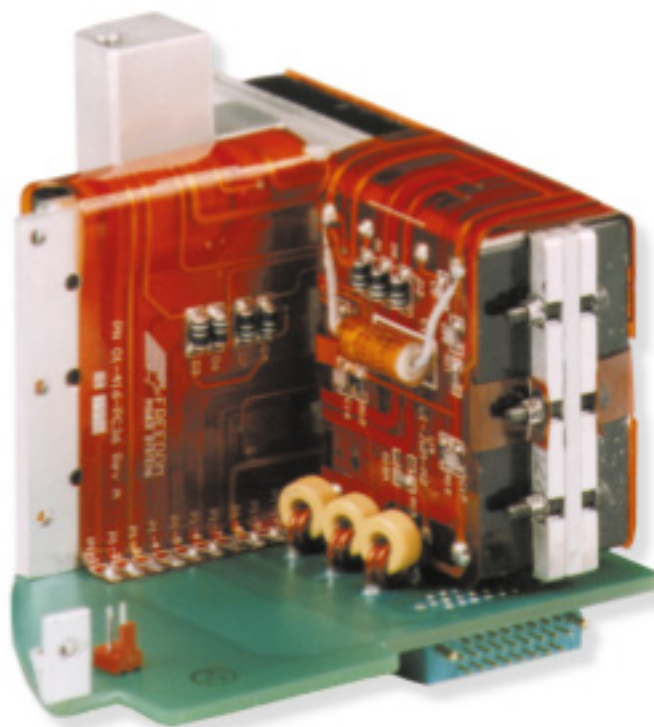

*F-2007: Multiple Output
Missile Power Supply*