


Industry: Defense
Application: Missile Guidance & Control
Summary: This 168 Watt supply provides 2 outputs in a ruggedized supply to power logic circuitry from a 28 Vdc battery input.

Specifications

Input: 18 to 36Vdc
Output: +5 Vdc @ 20 Amps
-5 Vdc @ 1 Amp
Total Power: 109 Watts
Dimensions: 4.4"W x 4.70"L x 3.2"H
Operating Temp. Range: -55° to +85°C
Acceleration: 20Gs
Cooling: Cold Plate
Other Features: HALT Qualified
Current Limiting
Programmable Start Up Sequence
Undervoltage Lockout

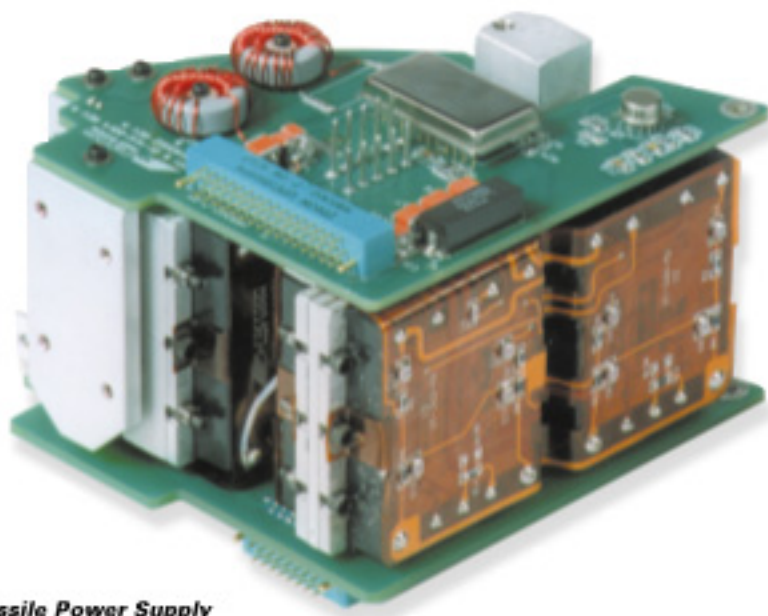

F-2012: Multiple Output Missile Power Supply